capillary

Category: تقنية

1 | written by princess ديسمبر، 2024

Private Medias Copyright Mbsm.tn
Picture Private Copyright WWW.MBSMGROUP.TN

n

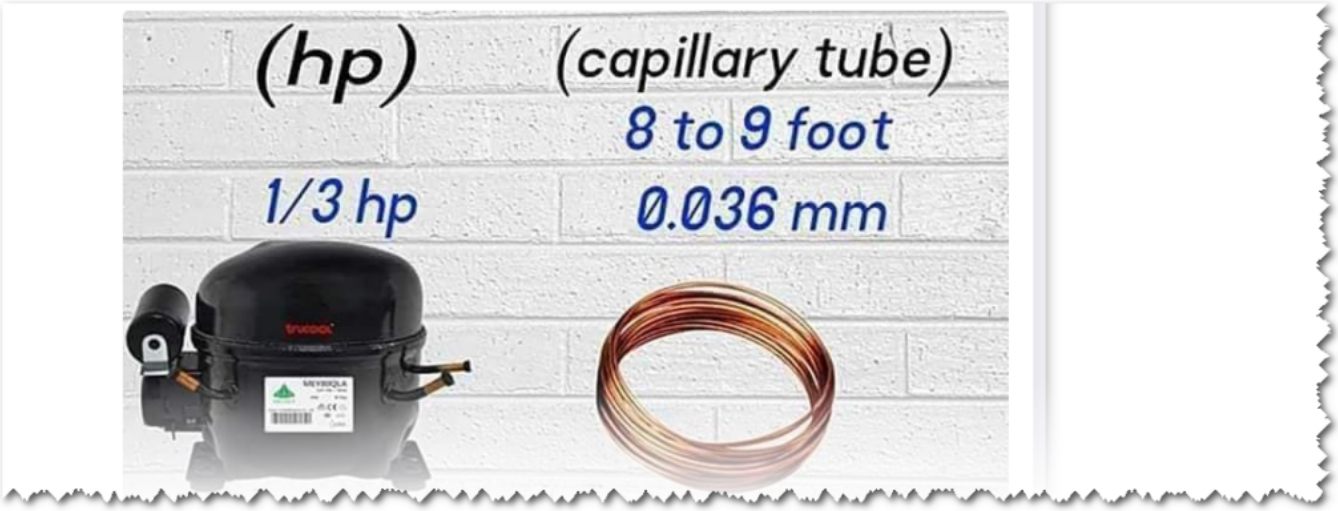

Private Medias Copyright Mbsm.tn
Picture Private Copyright WWW.MBSMGROUP.TN

nnnn

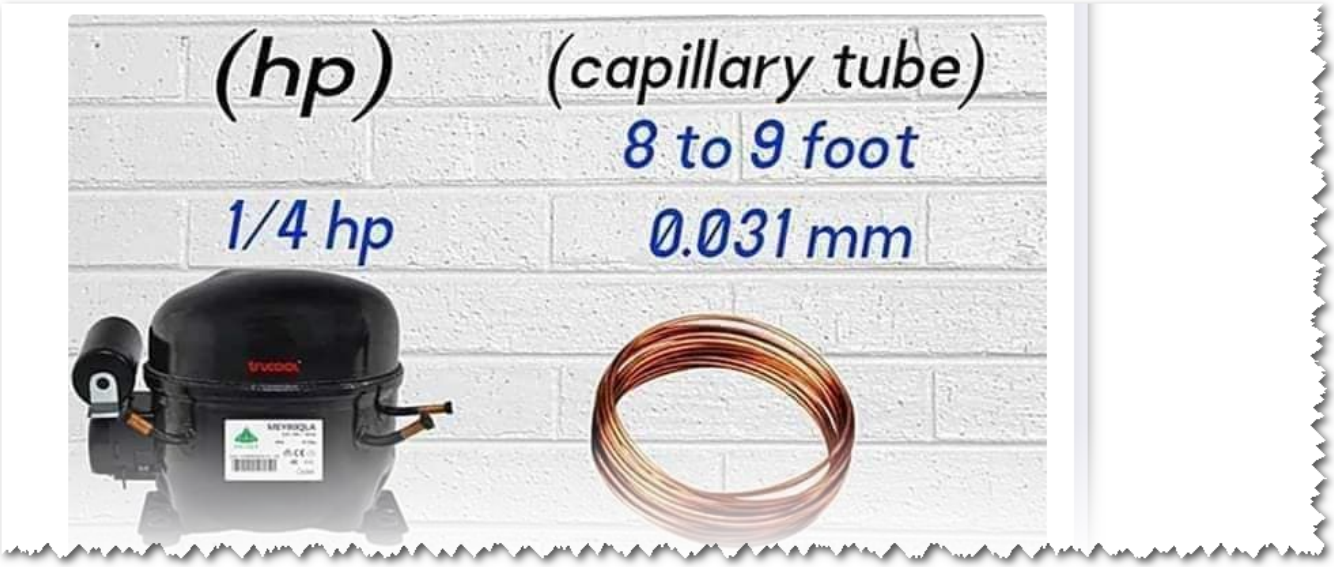

Private Medias Copyright Mbsm.tn
Picture Private Copyright WWW.MBSMGROUP.TN

nnnn

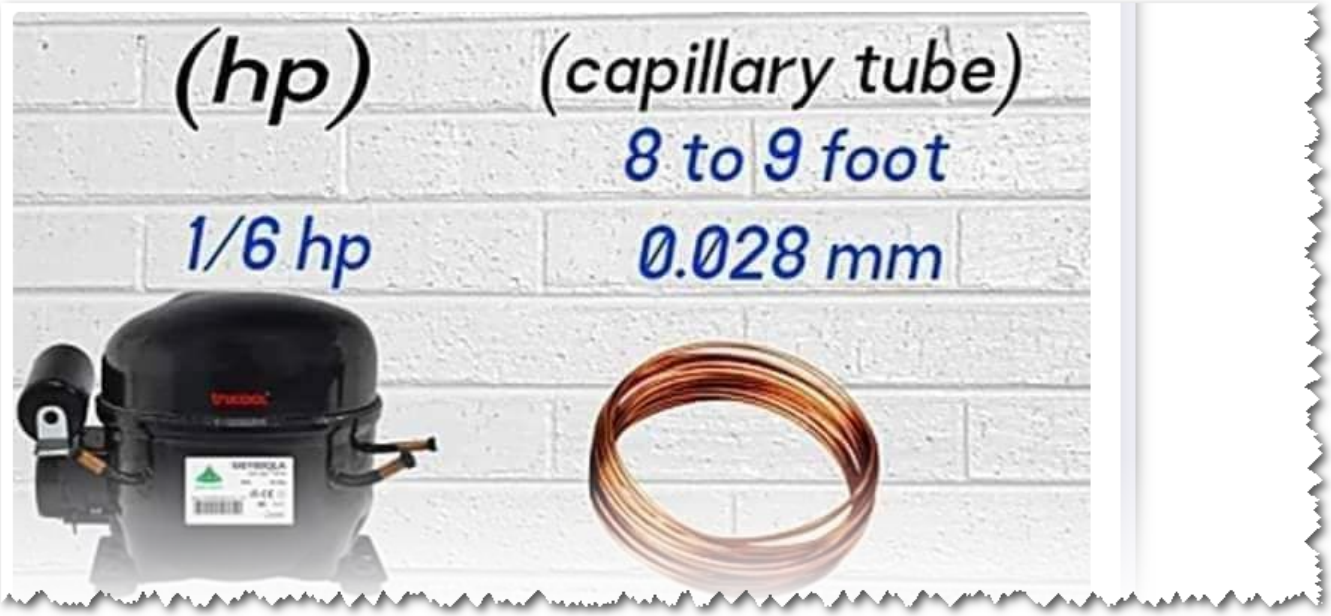

Private Medias Copyright Mbsm.tn
Picture Private Copyright WWW.MBSMGROUP.TN

nnnn

Private Medias Copyright Mbsm.tn
Picture Private Copyright WWW.MBSMGROUP.TN

nnnn

جدول شامل يوضح قدرة الضاغط وقطر الكابلاري لمركبات التبريد R134a وR600، بالإضافة إلى طول الكابلاري لكل منهما، مع إضافة خانة القدرة المستعملة بالوات:

nnnn

قدرة الضاغط (حصان)	القدرة المستعملة (وات)	قطر الكابلاري لـ R134a (مم)	قطر الكابلاري لـ R600 (مم)	طول الكابلاري لـ R134a (متر)	طول الكابلاري لـ R600 (متر)
1/10	75	0.025	0.031	3.0 – 2.0	3.5 – 2.5
1/8	100	0.028	0.035	3.0 – 2.0	3.5 – 2.5
1/6	150	0.028	0.035	3.0 – 2.0	3.5 – 2.5
1/4	200	0.031	0.039	3.0 – 2.0	3.5 – 2.5
1/3	250	0.039	0.045	3.5 – 2.5	4.0 – 3.0
1/2	375	0.055	0.060	4.0 – 3.0	4.5 – 3.5

nnnn

ملاحظات:

nnnn

n

1. **R134a:** يتطلب زياد طول الكابلاري بنسبة حوالي **10%** مقارنة بالجدول.

nnnn

2. **R600:** يمكن استخدام الأطوال المذكورة دون تعديل.

n

nnnn

جدول قياس كابليري امبراكو لفريون 134a
لدرجات حرارة منخفضة

موديل الضاغط	الاستطاعة	الاستطاعة W	-15°/-30°C° القطر	-15°/-30°C° الطول	-5°/-15°C° القطر	-5°/-15°C° الطول
EMT22H	1/12	75	0"24	4،m	0"24	3،5m
EMT36H	1/10	108	0"30	4,m	0"35	4.m
EMT43H	1/8	132	0"30	3,7m	0"35	3.7m
EMT49H	1/6	151	0"30	3,5m	0"35	3.5m
NB2116Z	1/5	176	0"30	3,3m	0"35	3.3m
NB1116Z	1/5	180	0"30	2.75m	0"35	2.75m
NB1118Z	1/4	191	0"35	4m	0"41	4.m
NB2118Z	1/4	191	0"35	3.3m	0"41	3.3m

Private Medias Copyright Mbsm.tn
Picture Private Copyright WWW.MBSMGROUP.TN

nnnn

جدول قياس كابليرى لدرجات حرارة متوسطة MBP

Enregistrer

R404A / R507	درجات حرارة متوسطة MBP		-20°/-5°C°		-5°/+15°C°	
موديل الضاغط	الاستطاعة	الازاحة	القطر	الطول	القطر	الطول
NEK6144GK	1/5	3،78	0"41	3،30m	0"41	2،80m
EMT6144U	1/4	4, 50	0"41	2,80m	0"41	2,45m
NB6152GR	1/4	5,20	0"41	3,10m	0"41	2.55m
NEK6152U	1/4+		0"41	2,65m	0"41	2.15m
NB61652G	5/16	6,5	0"41	2,45m	0"41	2.85m
NEK6165GK	1/3	5,20	0"41	,2,85m	0"41	2.45m
NEK6181GK	1/3+	7,28	0"41	3,m	0"41	1.55m
NEK6210U	1/2	8،82	0"41	2,75m	0"41	160m
T6217GK.	3/4+	18،22	0"41	160,m	0"41	1.70m
NT6226GK	1	21،41	0"41	2.75m	0"41	1.60m
NJ9232GK	1.1/3	26, 20	0"42	2,65m	0"79	2.05m
NJ238GK	1.1/2	32, 70	0"79	190,m	0"89	2.35m

قياسات الكابليري لدرجات حرارة متوسطة /امبراكو

Private Medias Copyright Mbsm.tn
Picture Private Copyright WWW.MBSMGROUP.TN

nnnn

جدول قياس كابليرى لدرجات حرارة منخفضة

R404A R507 R290 قياس كابليري درجات الحرارة المنخفضة -40°C / - 10°C

موديل الضاغط	التردد	الاستطاعة	الازاحة	القطر	الطول
NEK2121U	50	1/3	5.20	0".35	4.0m
NE2125GK	50	1/3+	8،87	0".35	4.0m
EMT2121U	60	1/3	5،57	0".35	3.5m
NEK2130GK	50	1/3+	6،76	0".35	3.0m
NE2134GK	60	1/2	8،78	0".35	2.65m
NK2150U	50	1/2+	13،54	0".35	2.4m
T2155GK	50	1/2	14،5	0",47	4.1m
	60			0".47	3.6m
NT2178GK	60	1	17،4	0".47	2.9m
NJ2192GK	50	1	22،4	0".55	3.5m
NJ2192GS	60	1.1/4	26،1	0".55	3.5m
NT2192GK	50	1	22،4	0".55	3.1m
NJ2212GK	50	1.1/4	34،4	0".62	3.5m
NJ2212GS	60	1.1/2	34،4	0".62	3.5m
NT2212GK	50	1.1/2	33،45	0".62	3.1m

Private Medias Copyright Mbsm.tn
Picture Private Copyright WWW.MBSMGROUP.TN

nnnn

جدول قياس كابليرى فريون R600 LBP

RAMÇOO Adsız e-tablo.pdf LBP temperature R600a

R600a كابليري درجات حرارة منخفضة -15°/-30°C° -5/-15°C°

موديل الضاغط	الاستطاعة HP	الاستطاعة W	الازاحة	القطر	الطول	القطر	الطول
EMU26CLC	1/12	83	5،18	0"25	4.0m	0"25	3.45m
EMT26CLP	1/12+	86	5،21	0"25	3.80m	0"25	3.30m
EMU32CLC	1/10		5،96	0"26	3.60m	0"30	3.60m
EMU40CLC	1/9	110	7،43	0"30	3.60m	0"35	3.60m
NBU1112Y	1/8	119	8،77	0"30	3.50m	0"35	3.50m
NBU1114	1/6	138	10،10	0"30	3.40m	0"35	3.40m
NBK1116Y	1/5	171	12،12	0"30	3.20m	0"3.5	3.20m
NBU1118Y	1/4	211	14،28	0"35	3.60m	0"41	3.60m

Private Medias Copyright Mbsm.tn
Picture Private Copyright WWW.MBSMGROUP.TN

n