


CR62KQM-TFD-202

تقنية: Category

2024, نوفمبر, written by Mahdi MILED | 18

COMPRESORES HERMÉTICOS PISTÓN



Copeland™
brand products


EMERSON
Climate Technologies

M B S M P P R
Motocompresores Herméticos Pistón
CR Series
AT & MT R22

Motocompresores Herméticos Pistón Copeland CR Series R22 AT-MT

Cód. SAP	Serie	HP	Tensión F/V	Desp. cm ³ /rev	Capac.* Frig/h	Pot. Abs. W	Amp	Aceite ml	Tipo Motor	Capacitor Marcha	Ø Conex. mm Succión	Desc.	Alto** mm
CO-CR18K6-PFJ-525	CRK6	1.5	1F - 220V	32.93	3698	1440	6.5	1331	PSC/CSCR	25µF/370V	3/4" S	1/2" S	335
CO-CR18K6-TFD-525	CRK6	1.5	3F - 380V	32.96	3698	1410	2.7	1331	3F	NA	3/4" S	1/2" S	333
CO-CR24K6M-PFZ-102	CRK6M	2	1F - 220V	44.28	4950	1950	8.5	1331	PSC/CSCR	36µF/440V	5/8" S	3/8" S	339
CO-CR24K6M-TFD-102	CRK6M	2	3F - 380V	44.28	4975	1975	3.6	1331	3F	NA	5/8" S	3/8" S	345
CO-CR34K6M-PFZ-102	CRK6M	2.8	1F - 220V	59.66	7175	2850	14	1331	CSCR	45µF/440V	3/4" S	3/8" S	358
CO-CR37K6M-PFZ-102	CRK6M	3	1F - 220V	63.52	7800	3060	16	1331	CSCR	50µF/440V	3/4" S	3/8" S	358
CO-CR37K6M-TFD-102	CRK6M	3	3F - 380V	63.52	7800	3000	5.6	1331	3F	NA	3/4" S	3/8" S	358
CO-CR53KQM-TFD-202	CRKQM	4	3F - 380V	88.28	11175	4350	7.7	1331	3F	NA	7/8" S	1/2" S	362
CO-CR57KQM-TFD-202	CRKQM	4.5	3F - 380V	94.61	11950	4650	8.3	1331	3F	NA	7/8" S	1/2" S	362
CO-CR62KQM-TFD-202	CRKQM	5	3F - 380V	101.92	12875	5100	8.8	1331	3F	NA	7/8" S	1/2" S	362

*Rendimientos en Condiciones ARI: +7.2°C T. Evap. / 54.4°C T. Cond. / 35°C temp. Amb. / 46.1°C T. Líquido / 18.3°C T. Retorno Gas
** Sin tacos de Montaje

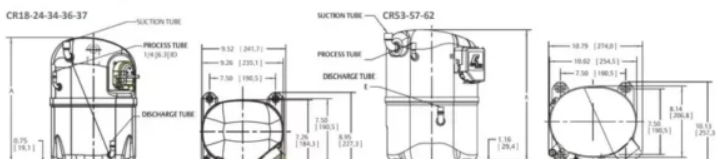

Mbsm.tn, Compressor, CR62KQM-TFD-202, Copeland, Hermetic, 5 hp, 3ph ,